


TFC/U-JIN Coaxial Cable Product Information Sheet

Type: Flex - 5/75

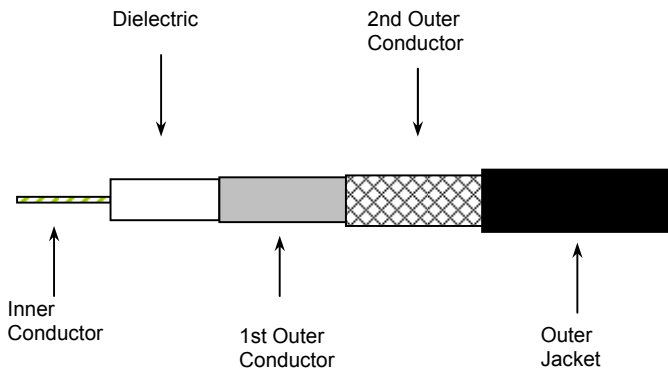

Series 5/75 Coaxial Cable

Stranded Tinned Copper Conductor
 Foamed Polyethylene Dielectric
 88% Tinned Copper Braid
 80% Tinned Copper Braid
 Gray PVC Jacket

Cable Ordering Information

Part Number	MI Number	NEC / CSA Listing
Flex-5/75	UNPR-137	none

Characteristics

Material	Detail	inches	mm
Inner Conductor	Stranded Tinned Copper	7 / 0.0075	19 / 0.19
Dielectric	Solid Polyethylene	0.111	2.82
1 st Outer Conductor	---	---	---
2 nd Outer Conductor	88% Tinned Copper Braid	0.131	3.33
3 rd Outer Conductor	80% Tinned Copper Braid	0.151	3.84
4 th Outer Conductor	---	---	---
Floodant	---	---	---
Jacket	Gray PVC	0.185	4.70
Twisted Pairs	---	---	---
Messenger	---	---	---

Mechanical Specifications

Product Weight	(less reel)	23 lbs /kft	35 kg/km
----------------	-------------	-------------	----------

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: Flex-5/75
 Revision: 1.11.2007
 Page: 1 of 2

uncontrolled copy

All Rights Reserved,
 Specifications subject to change without notice

